



“Quality That Gives
Confidence to Farmer”

PRODUCT CATALOGUE

ABOUT US

Our company is a brand which is established in order to produce reliable agricultural products in its sector, to provide technical services and to develop new products by combining experience with manufacturing. It aims to become an important brand in its sector in Turkey and abroad with its existing knowledge, machinery and experienced workforce.

Our aim is to be a locomotive company that creates firsts in the sector and to be a solution partner for our customers and to sign important projects in Turkey and abroad. By adopting the principle of trust and customer satisfaction in all its works, it accepts complete quality understanding as management policy strategic value. We began to improve our sales, marketing and technical infrastructure particularly in Turkey and worldwide even in manufacturing and marketing fields through our knowledge and experience in sector.






SPRAYING MACHINES

● GARDEN SPRAYER



● OPTIONS

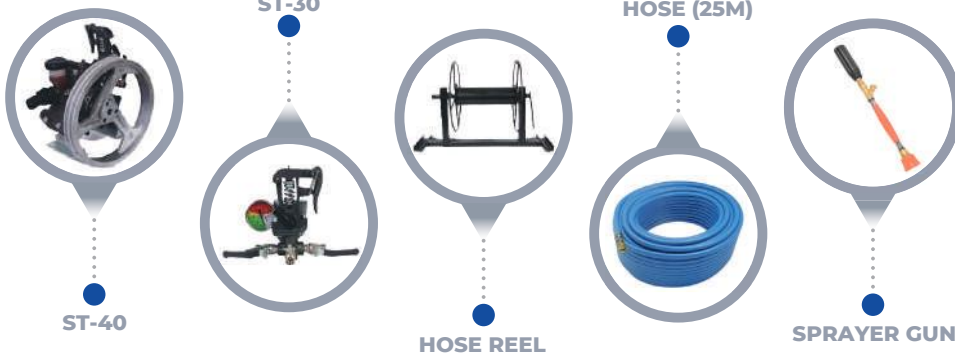

● SPECIFICATIONS

3 piston pumps are used in our sprayings. Our pumps are powered by the By-Pass system.

Our machines are manually pushed in the garden. It is offered to our valued customers with gasoline and electric motor options.


● TECHNICAL INFORMATION

TANK CAPACITY	100	200
Engine Power	6,5 hp	6,5 hp
Engine Type	Gasoline 4 Stroke	Gasoline 4 Stroke
Speed	3600 rpm	3600 rpm
Fuel Capacity	3,6 L	3,6 L
Pump	3 Piston	3 Piston
Pump Pressure	35 bar	35 bar

● TRAILED TYPE GARDEN SPRAYER



● OPTIONS

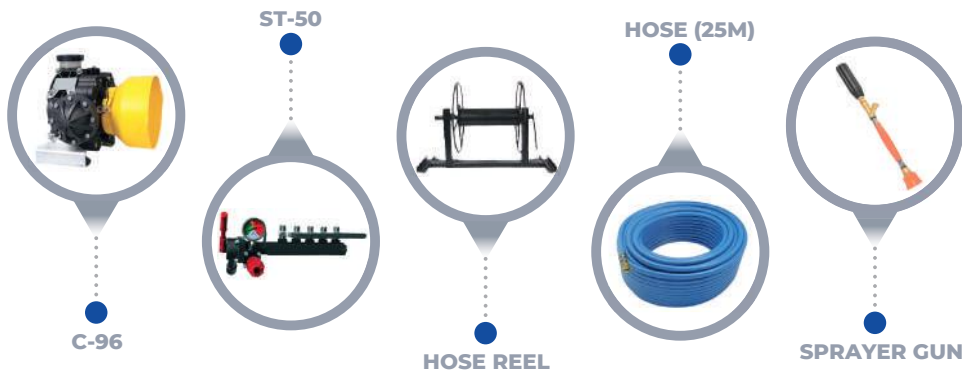

● SPECIFICATIONS

C-96 or A-105 pumps are used in our sprayings. Our tank options are polyethylene or polyester tank

It is used with a thick and reinforced chassis. It has ST-50 control system.

Our machine is presented to you, our valued customers, with double hose winders and 25 meters of hose.


● TECHNICAL INFORMATION

TANK CAPACITY	1000 LT	1200 LT	1600 LT	2000 LT
Pump Type	C-96	C-96	C-96	C-96
Pump Flow	96 L	96 L	96 L	96 L
Regulator	ST-50	ST-50	ST-50	ST-50
Hose	25 m	25 m	25 + 25 m	25 + 25 m

● MOUNTED TYPE FIELD SPRAYER



● OPTIONS

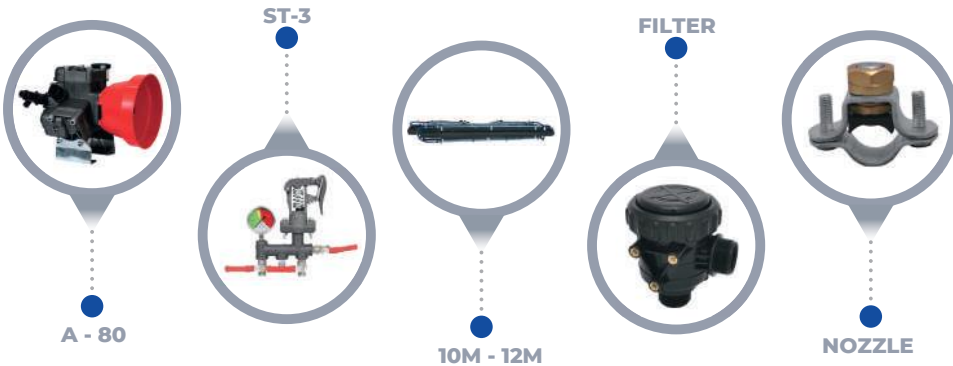

● SPECIFICATIONS

3 or 4 membrane pump sareused in our sprayings. Our pumps have a longer life with the By-Pass system.

Its tanks are made of reinforced polyester or polyethylene and are resis tant to external effects and corrosion

Arm length swchich are proportional to the tank capacity can be manu factured as 8 -18 meters on request.


● TECHNICAL INFORMATIONS

TANK CAPACITY	400	500	600	800	1000
Pump Type	M-80	M-80	M-80	HS-105	HS-105
Pump Flow	80 L	80 L	80 L	105 LT	105 LT
Max. Pressure	50 bar	50 bar	50 bar	50 bar	50 bar
Pump Speed	540 rpm	540 rpm	540 rpm	540 rpm	540 rpm
Width	80 cm	80 cm	80 cm	90 cm	90 cm
Lenght	110 cm	120 cm	125 cm	140 cm	150 cm
Height	130 cm	140 cm	150 cm	160 cm	170 cm
Weight	130 kg	140 kg	150 kg	160 kg	170 kg

● MOUNTED TYPE HYDRAULIC LIFTED FIELD SPRAYER



● OPTIONS

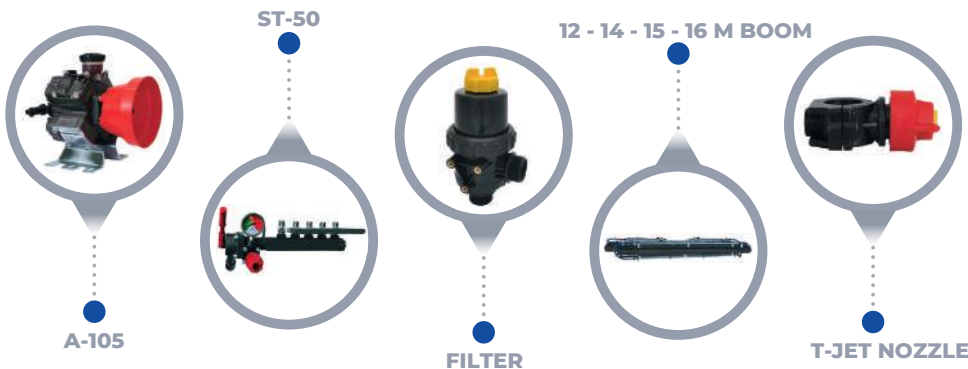

● SPECIFICATIONS

C-96 or A-105 pumps are used in our machines. Our pumps has a longer life with the By-Pass system.

Arm lengths which are proportional with tank capacity are manufactured optionally as 12 -14-16- 18 Our machines are used as 600-800-1000LT.

They are presented to our valued customers together with its reinforced frame.


● TECHNICAL INFORMATION

TANK CAPACITY	600 LT	800 LT	1000 LT
Pump Model	A-105	A-105	A-105
Pump Flow	105 L	105 L	105 L
Pump Pressure	50 bar	50 bar	50 bar
Regulator	ST-50	ST-50	ST-50
Working Width	12-14-15-16 m	12-14-15-16 m	12-14-15-16 m
Nozzles Type	Brass	Brass	Brass
Nozzles Number	24-28-33	24-28-33	24-28-33
Height Adjustment	Hydraulic	Hydraulic	Hydraulic
Boom Adjustment	Manual	Manual	Manual
Operation Speed	540 rpm	540 rpm	540 rpm
Weight	250 kg	280 kg	320 kg

● MOUNTED TYPE HYDRAULIC LIFTED FIELD SPRAYER



● OPTIONS

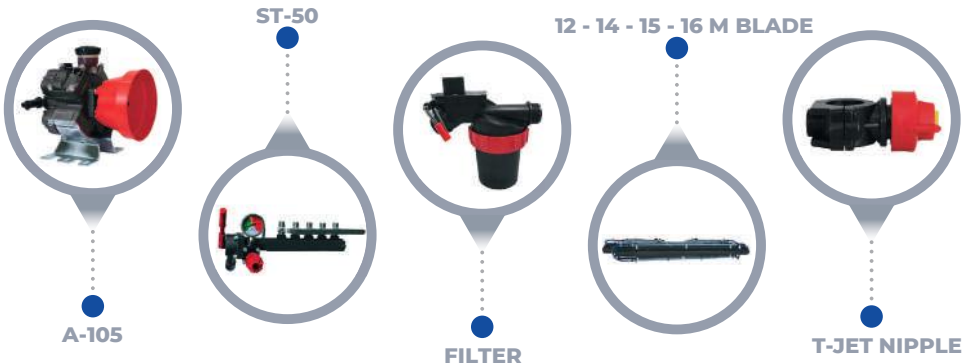

● SPECIFICATIONS

C-96 or A-105 pumps are used in our machines. Our pumps has a longer life with the By-Pass system. The tanks are made of reinforced polyester or polyethylene and are resistant to external influences and corrosion.

Arm lengths which are proportional with tank capacity are manufactured optionally as 12 -14-16- 18 Our machines are used as 800-1000LT.

They are presented to our valued customers together with its reinforced frame.

● TECHNICAL INFORMATION

TANK CAPACITY	800 LT	1000 LT	1200 LT
Pump Model	C-96	C-96	C-96
Pump Flow	96 L	96 L	96 L
Pump Pressure	50 bar	50 bar	50 bar
Regulator	ST-50	ST-50	ST-50
Working Width	12-14-15-16 m	12-14-15-16 m	12-14-15-16 m
Nozzles Type	Brass	Brass	Brass
Nozzles Number	24-28-30-33-36	24-28-30-33-36	24-28-30-33-36
Height Adjustment	Hydraulic	Hydraulic	Hydraulic
Boom Adjustment	Manual	Manual	Manual
Operation Speed	540 rpm	540 rpm	540 rpm
Weight	350 kg	400 kg	450 kg


MOUNTED TYPE FULL HYDRAULIC FIELD SPRAYER



OPTIONS




A-105



ST-50



FILTER

HYDRAULIC BOOM
(15 - 18 M)


3 T-JET FILTER

SPECIFICATIONS

C-96 or A-105 pumps are used in our machines. Our pumps has a longer life with the By-Pass system.

They are used with up-down and right-left hydraulic by means of levers over it.

Arm lengths which are proportional with tank capacity are manufactured optionally as 12 -14-16- 18.


TECHNICAL INFORMATION

TANK CAPACITY	800 LT	1000 LT	1200 LT
Pump Model	C-96	C-96	C-96
Pump Flow	96 L	96 L	96 L
Pump Pressure	50 bar	50 bar	50 bar
Regulator	ST-50	ST-50	ST-50
Working Width	15-18 mm	15-18 mm	15-18 mm
Nozzles Type	Brass	Brass	Brass
Nozzles Number	30-36	30-36	30-36
Height Adjustment	Hydraulic	Hydraulic	Hydraulic
Boom Adjustment	Manual	Manual	Manual
Operation Speed	540 rpm	540 rpm	540 rpm
Weight	450 kg	500 kg	550 kg

● TRAILED TYPE FIELD SPRAYER



● OPTIONS

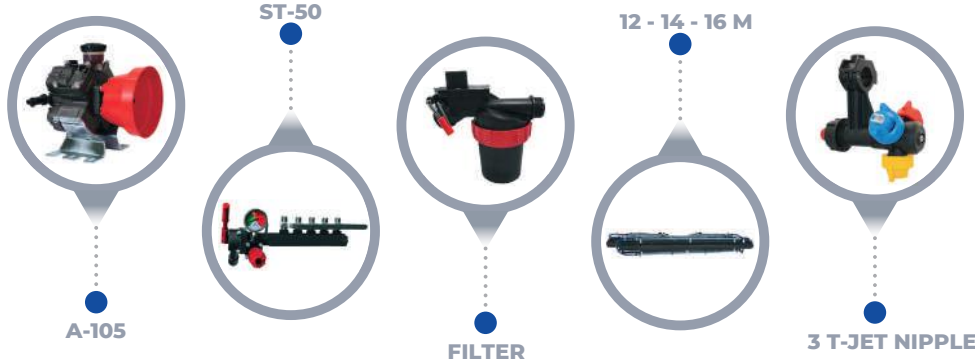

● SPECIFICATIONS

C-96 or A-105 pumps are used in our sprayings. Our tank options are polyethylene or polyester storage.

It is used with a thick and reinforced chassis arm. It is shipped with a 16 meter wing. It has By-Matic control system.


● TECHNICAL INFORMATION

TANK CAPACITY	1000 LT	1200 LT	1600 LT	2000 LT
Pump Model	C-96	C-96	C-96	C-96
Pump Flow	96 L	96 L	96 L	96 L
Regulator	By-Matic	By-Matic	By-Matic	By-Matic
Working Width	12 - 14 - 16 m	12 - 14 - 16 m	12 - 14 - 16 m	12 - 14 - 16 m
Nozzles Type	T-Jet	T-Jet	T-Jet	T-Jet
Nozzles Number	33	33	33	33
Height Adjustment	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Operation Speed	540 rpm	540 rpm	540 rpm	540 rpm
Weight	400 kg	450 kg	500 kg	550 kg

● MOUNTED TYPE TURBO ATOMIZER



● OPTIONS

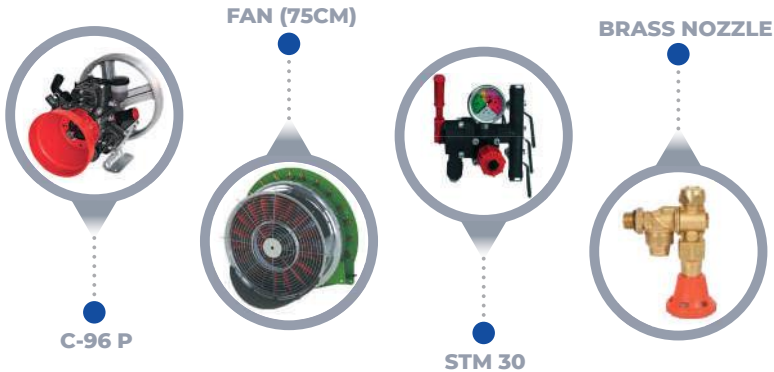

● SPECIFICATIONS

Two options are offered in our machines, as with gearbox and pulley. C-96Z or A-105Z pump is used.

Our pumps have a longer life with the By-Pass system. Our machines are especially used for the spraying of vineyards, forests and various wooded areas.

Our machines are used as 400-500-600-800-1000 LT.


● TECHNICAL INFORMATION

TANK CAPACITY	400 LT	500 LT	600 LT	800 LT	1000 LT
Pump Mode	C-96 P	C-96 P	C-96 P	C-96 P	C-96 P
Pump Flow	96 L	96 L	96 L	96 L	96 L
Pump Pressure	50 bar	50 bar	50 bar	50 bar	50 bar
Regulator	STM-30	STM-30	STM-30	STM-30	STM-30
Nozzles Type	Brass (With Stopper)	Brass (With Stopper)	Brass (With Stopper)	Brass (With Stopper)	Brass (With Stopper)
Nozzles Number	4+4	4+4	5+5	5+5	5+5
Fan Diameter	60 cm	60 cm	75 cm	75 cm	75 cm
Operation Speed	540 rpm	540 rpm	540 rpm	540 rpm	540 rpm
Weight	240 kg	260 kg	280 kg	300 kg	330 kg

MOUNTED TYPE TURBO ATOMIZER WITH GEARBOX



OPTIONS

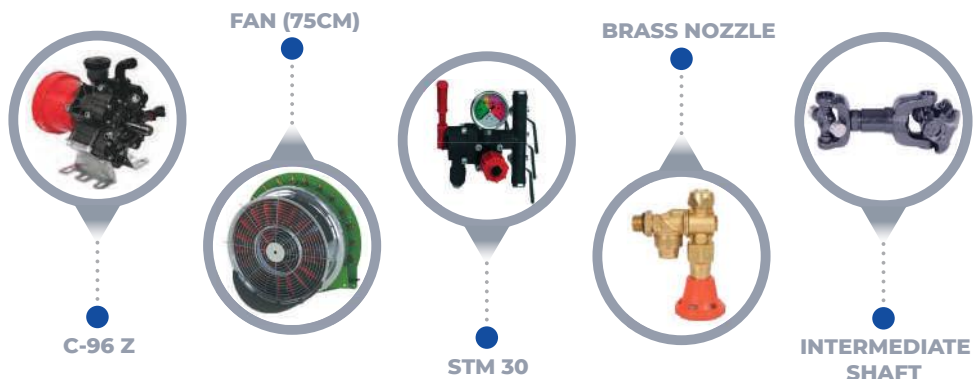

SPECIFICATIONS

Two options are offered in our machines, as with gearbox and pulley. C-96Z or A-105Z pump is used.

Our pumps have a longer life with the By-Pass system. Our machines are especially used for the spraying of vineyards, forests and various wooded areas.

Our machines are used as 400-500-600-800-1000 LT.


TECHNICAL INFORMATION

TANK CAPACITY	400 LT	500 LT	600 LT	800 LT	1000 LT
Pump Model	C-96 Z	C-96 Z	C-96 Z	C-96 Z	C-96 Z
Pump Flow	96 L	96 L	96 L	96 L	96 L
Pump Pressure	50 bar	50 bar	50 bar	50 bar	50 bar
Regulator	ST-30	ST-30	ST-30	ST-30	ST-30
Nozzles Type	Brass (With Stopper)	Brass (With Stopper)	Brass (With Stopper)	Brass (With Stopper)	Brass (With Stopper)
Nozzles Number	4+4	4+4	5+5	5+5	5+5
Fan Diameter	60 cm	60 cm	75 cm	75 cm	75 cm
Operation Speed	540 rpm	540 rpm	540 rpm	540 rpm	540 rpm
Weight	220 kg	240 kg	260 kg	280 kg	310 kg

● TRAILED TYPE TURBO ATOMIZER



● OPTIONS

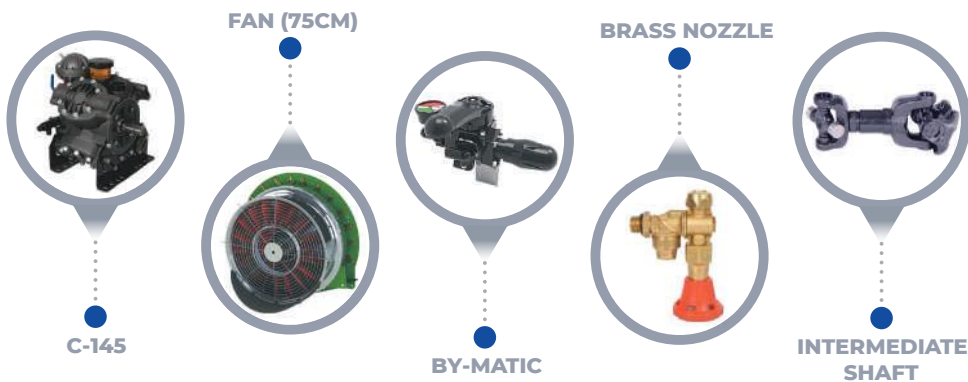

● SPECIFICATIONS

C-96 or C-145 pumps are used in our machines. Our pumps have a longer life with the By-Pass system. It is especially suitable for spraying vineyards, forests and various wooded areas.

Air movement plays an important role in the pesticide penetration of the targets with dense structure.

Therefore, it is mainly used in applications with insecticides and fungicides.

Our machines are used as 1000-1200-1600-2000 LT.


● TECHNICAL INFORMATION

TANK CAPACITY	1000 LT	1200 LT	1600 LT	2000 LT
Pump Model	C-145	C-145	C-145	C-145
Pump Flow	145 L	145 L	145 L	145 L
Pump Pressure	50 bar	50 bar	50 bar	50 bar
Regulator	By-Matic	By-Matic	By-Matic	By-Matic
Nozzles Type	Brass (With Stopper)	Brass (With Stopper)	Brass (With Stopper)	Brass (With Stopper)
Nozzles Number	5+5	8+8	8+8	8+8
Fan Diameter	75 cm	90 cm	90 cm	90 cm
Operation Speed	540 rpm	540 rpm	540 rpm	540 rpm
Weight	520 kg	540 kg	560 kg	580 kg

● TRAILED TYPE TURBO ATOMIZER ROBOTIC FAN MODEL



● OPTIONS

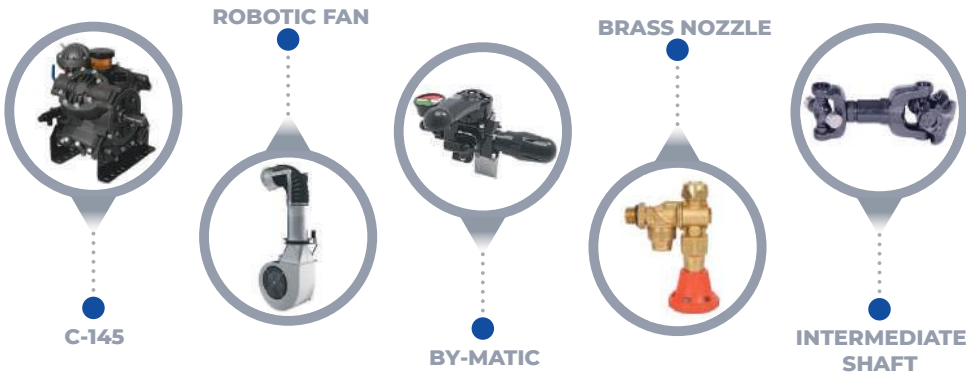

● SPECIFICATIONS

There is a C-145 pump in the Robotic Fan Atomizer. Our pumps with By-Pass system provide longer service life.

Brass nozzle with stopper is used as nozzle type. Control system is By-Matic. Working width performs 40-45 mt shooting in fertile soils.

● TECHNICAL INFORMATION

TANK CAPACITY	2000 LT
Pump Model	C-145
Pump Flow	145 L
Pump Pressure	50 bar
Control	By-Matic
Nozzles Number	5+5
Working Width	40 - 45 m
Weight	700 kg



FERTILIZATION MACHINES

● ROUND TYPE FERTILIZER SPREADER



● OPTIONS

Disc and Blade



● SPECIFICATIONS

It is used for distributing fertilizer into field homogenously and for providing fluidity more properly.


● TECHNICAL INFORMATION

TANK CAPACITY	350 LT	500 LT
Height	120 cm	135 cm
Weight	75 kg	85 kg
Width	115 cm	125 cm
Length	115 cm	125 cm
Work Capacity	16-18 m	16-18 m
Number of Blades	6 pcs	6 pcs
Number of Discs	1 pcs	1 pcs

● SINGLE DISC FERTILIZER SPREADER



● OPTIONS

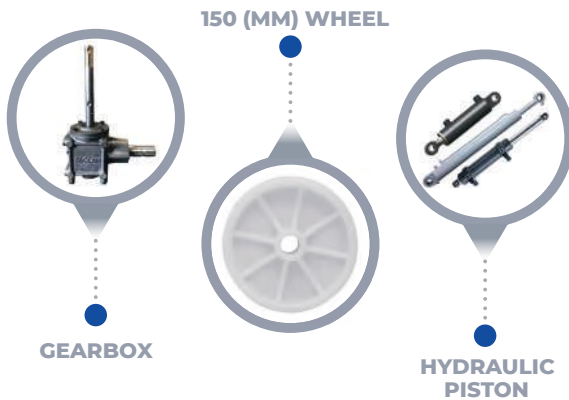

● SPECIFICATIONS

It is used for distributing fertilizer into field homogenously and for providing fluidity more properly.


● TECHNICAL INFORMATION

TANK CAPACITY	400 LT	500 LT	600 LT	800 LT	1000 LT
Lenght	1,15 m	1,15 m	1,15 m	1,15 m	1,15 m
Height	1,15 m	1,25 m	1,35 m	1,35 m	1,35 m
Width	1,05 m	1,05 m	1,05 m	1,15 m	1,20 m
Working Width	18-24 m	18-24 m	18-24 m	18-24 m	18-24 m
Weight	120 kg	135 kg	145 kg	160 kg	180 kg
Power Requirement	40 hp	50 hp	50 hp	55 hp	65
Required Speed	540 rpm	540 rpm	540 rpm	540 rpm	540 rpm
Operation System	Shaft	Shaft	Shaft	Shaft	Shaft

● DOUBLE DISC FERTILIZER SPREADER



● OPTIONS

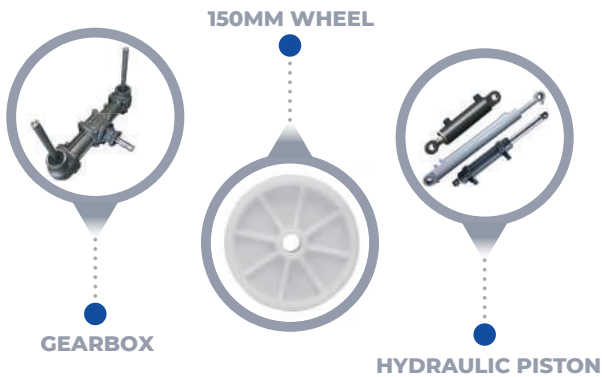

● SPECIFICATIONS

It is used for distributing fertilizer into field homogenously and for providing fluidity more properly.

● TECHNICAL INFORMATION

TANK CAPACITY	1000 LT	1200 LT
Lenght	1,80 m	1,90 m
Height	1,25 m	1,35 m
Width	1,30 m	1,40 m
Working Width	18-24 m	18-24 m
Weight	200 kg	220 kg
Power Requirement	65 hp	70 hp
Required Speed	540 rpm	540 rpm
Operation System	Shaft	Shaft

MANURE SPREADER



OPTIONS



Wide Angle Shaft

Side Support



Adjustable Pulling System

SPECIFICATIONS

With its high quality chassis structure and superior road handling, it provides high confidence in all types of environmental conditions. Especially when it comes to difficult fertilizing work,


TECHNICAL INFORMATION

CAPACITY	5000	1000	15000	20000
Lenght	5000 mm	5480 mm	6900 mm	6350 mm
Width	2300 mm	2310 mm	2500 mm	2490 mm
Height	2550 mm	2750 mm	2880 mm	3020 mm
Weight	2950 kg	4100 kg	4450 kg	4950 kg
Spreading Width	5-18 m	5-18 m	5-18 m	5-18 m
Axle Type	Single	Tandem	Tandem	Tandem
Power Requirement	60 hp	80 hp	100 hp	120 hp

● SLURRY TANKER



● OPTIONS

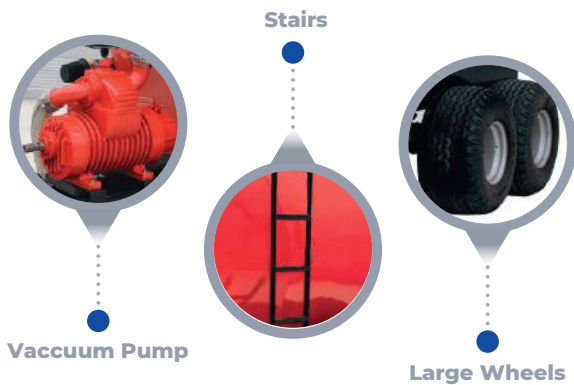

● SPECIFICATIONS

Slurry Tankers are thought out to the finest detail and has a high quality workmanship. It has a long life-span due to its quality steel structure and strength. It provides protection against corrosion due to its special paint which is a standard. A galvanized coating is optional.

● TECHNICAL INFORMATION

CAPACITY	7000 LT	8000 LT	1000 LT	12000 LT	16000 LT	20000 LT
Lenght	6500 mm	8150 mm	7200 mm	7550 mm	7690 mm	9950 mm
Width	2400 mm	2300 mm	2260 mm	2400 mm	2585 mm	2225 mm
Height	2850 mm	2600 mm	3150 mm	32 mm	3910 mm	2870 mm
Weight	3280 kg	3380 kg	3850 kg	3950 kg	4805 kg	5100 kg
Spreading Width	5-18 m	5-18 m	5-18 m	5-18 m	5-18 m	5-18 m
Axle Type	Single	Tandem	Tandem	Tandem	Tandem	Tridem
Power Requirement	75 hp	80 hp	90 hp	100 hp	120 hp	130 hp



SEEDING MACHINES

COMBINED SEED DRILL




SPECIFICATIONS

Combined seed drill is a pull type sowing machine that is easy to use and drops cereal, legume and feed seeds and fertilizer to the seed bed opened by the discs continuously thanks to the helical sheaves with the requested quantity and depth with the help of leveling system.

TECHNICAL INFORMATION

NUMBER OF TINES	16 PCS	18 PCS	20 PCS	22 PCS	24 PCS	26 PCS
Total Length	233 cm	233 cm	233 cm	233 cm	233 cm	233 cm
Total Width	302 cm	338 cm	366 cm	394 cm	422 cm	450 cm
Hopper Height	132 cm	136 cm	136 cm	136 cm	136 cm	2870 mm
Weight	950 kg	1000 kg	1080 kg	1150 kg	1220 kg	1290 kg
Working Width	210 cm	238 cm	266 cm	294 cm	322 cm	350 cm
Seed Capacity (Wheat)	265 kg	300 kg	325 kg	355 kg	385 kg	415 kg
Fertilizer Capacity	310 kg	350 kg	385 kg	385 kg	455 kg	495 kg
Tire Dimension	7,5x16 inch	7,5x16 inch	7,5x16 inch	7,5x16 inch	7,5x16 inch	7,5x16 inch
Power Requirement	45-50 hp	50-55 hp	55-60 hp	60-65 hp	65-70 hp	70-75 hp

OPTIONS



Emptying Handle

Double Cover




Harrow

● COMBINED SEED DRILL



● OPTIONS

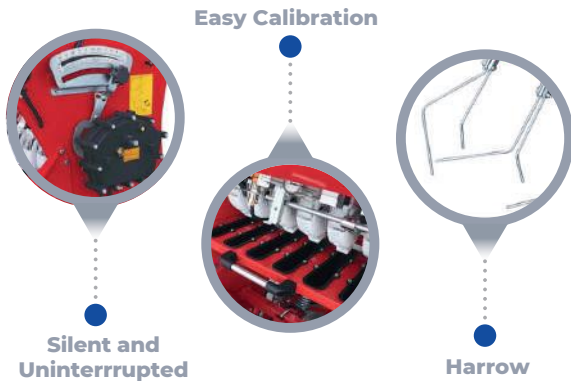

● SPECIFICATIONS

Due to its adjustable and variable-speed transmission, it is an easy to use hanging type sowing machine that drops the desired amount in seed bed opened by three-row spring tines precisely.

Sowing machine is manufactured as types with fertilizer, without fertilizer and with warning post emergence tramlining system.

● TECHNICAL INFORMATION

NUMBER OF TINES	19 PCS	21 PCS	23 PCS	25 PCS	27 PCS	29 PCS
Total Length	250 cm	250 cm	250 cm	250 cm	250 cm	250 cm
Total Width	243 cm	268 cm	293 cm	318 cm	343 cm	368 cm
Total Height	170 cm	170 cm	170 cm	170 cm	170 cm	170 mm
Weight	830 kg	890 kg	950 kg	1010 kg	1065 kg	1125 kg
Working Width	225 cm	250 cm	275 cm	300 cm	325 cm	350 cm
Seed Capacity (Wheat)	220 kg	247 kg	275 kg	300 kg	330 kg	352 kg
Fertilizer Capacity	295 kg	328 kg	365 kg	402 kg	435 kg	475 kg
Tire Dimension	6,00x16 inch	6,00x16 inch	6,00x16 inch	6,00x16 inch	6,00x16 inch	6,00x16 inch
Power Requirement	60 hp	60 hp	80 hp	80 hp	80 hp	100 hp

● PNEUMATIC SEEDER



● OPTIONS



Fan

Dumper



Vaccuum Meter


● SPECIFICATIONS

This machine which is called pneumatic precision sowing machine, is an agricultural machine that is driven only by cardan shaft and PTO shaft of the tractor and works with hydraulic lifting unit of the tractor and universal 3-point hanging system.


● TECHNICAL INFORMATION

NUMBER OF UNITS	4 PCS	5 PCS	6 PCS	8 PCS
Total Length	200 cm	200 cm	200 cm	200 cm
Total Width	300 cm	300 cm	380cm	600 cm
Total Height	160 cm	160 cm	160 cm	160 cm
Weight without Fertilizer Hopper	700 kg	850 kg	1000 kg	1300 kg
Weight with Fertilizer Hopper	950 kg	1100 kg	1250 kg	1500 kg
Seed Capacity	45x4 kg	45x5 kg	45x6 kg	45x8 kg
Fertilizer Capacity	170x2 kg	170x2 kg	170x2 kg	170x4 kg
Tire Dimension	500x15 inch	500x15 inch	500x15 inch	500x15 inch
Power Requirement	60 hp	70 hp	80 hp	100 hp

● PNEUMATIC SEEDER SHARED DISC

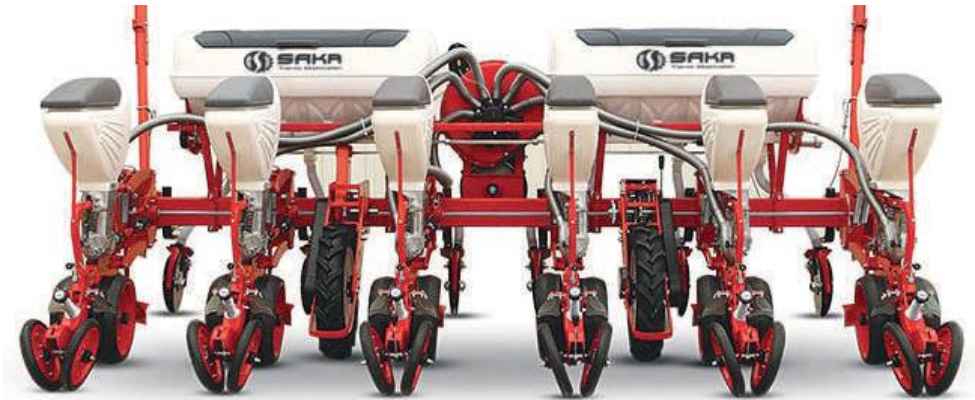

● OPTIONS

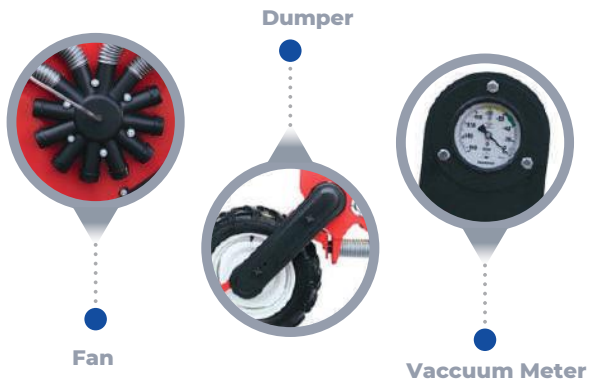

● SPECIFICATIONS

This machine which is called pneumatic precision sowing machine, is - an agricultural machine which is driven only by cardan shaft and PTO shaft of the tractor and works with hydraulic lifting unit of the tractor and universal 3-point hanging system.

● TECHNICAL INFORMATION

NUMBER OF UNITS	4 PCS	5 PCS	6 PCS	8 PCS
Total Length	200 cm	200 cm	200 cm	200 cm
Total Width	300 cm	300 cm	380cm	600 cm
Total Height	160 cm	160 cm	160 cm	160 cm
Weight without Fertilizer Hopper	950 kg	1020 kg	1250 kg	1500 kg
Weight with Fertilizer Hopper	1150 kg	1220 kg	1450 kg	2000 kg
Seed Capacity	40x4 kg	40x5 kg	40x6 kg	40x8 kg
Fertilizer Capacity	170x2 kg	170x2 kg	170x2 kg	170x4 kg
Tire Dimension	500x15 inch	500x15 inch	500x15 inch	500x15 inch
Power Requirement	60 hp	70 hp	80 hp	100 hp



FARM EQUIPMENT

VERTICAL TYPE FODDER MIXER




SPECIFICATIONS

The special blades of fodder mixer is to cut any kind of forage rapidly and reduce horsepower requirement by decreasing the friction on the feed. Drop floor models are useful for farms with narrow aisles.

TECHNICAL INFORMATION

OPTIONS

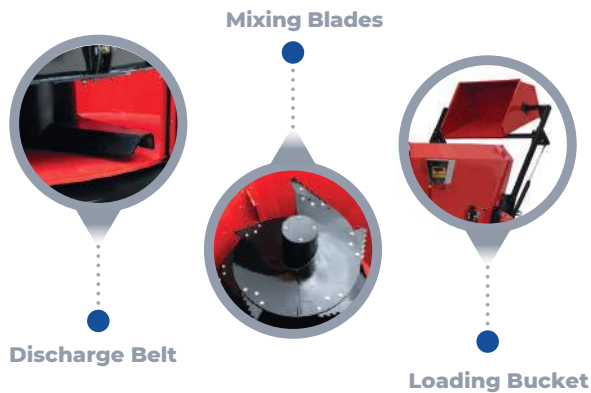

CAPACITY	4	5	6	8	10	12
Lenght	3670 mm	3770 mm	3810 mm	5100 mm	5180 mm	5270 mm
Width	1900 mm	1900 mm	1900 mm	2240 mm	2240 mm	2240 mm
Height	2560 mm	2580 mm	2830 mm	2560 mm	2850 mm	3150 mm
Weight	1465 kg	1570 kg	1645 kg	2750 kg	2900 kg	3100 kg
Power Requirement	40 hp	55 hp	55 hp	65 hp	75 hp	75 hp

● HORIZONTAL TYPE FODDER MIXER



● OPTIONS

Special Cutting Blades



Double Horizontal Auger



Discharge Band

● SPECIFICATIONS

These machines are ideal for Daily use by farmers. It has been specially designed to make the farmer's job easier, increase its profitability and to speed up its development.

● TECHNICAL INFORMATION

CAPACITY	6	8	10	12
Lenght	5280 mm	5500 mm	6075 mm	6800 mm
Width	1810 mm	2148 mm	2145 mm	2145 mm
Height	2418 mm	2600 mm	2600 mm	2600 mm
Weight	2600 kg	3370 kg	4450 kg	4950 kg
Power Requirement	40 hp	55 hp	65 hp	85 hp

● BALE LOADER



● SPECIFICATIONS


Bale Loading Machine; It is a machine that collects the prismatic bales waiting on the field surface and loads them on the trailer. The person on the trailer stacks the loaded bales properly.

The machine takes its movement from the tractor PTO. By means of the hydraulic system on the machine, the height of the machine can be adjusted as desired.

● TECHNICAL INFORMATION

WORKING CAPACITY / 12 HOURS	2500-3000
Height	430 cm
Width	180 cm
Weight	480 kg
Power Requirement	30 hp

● OPTIONS

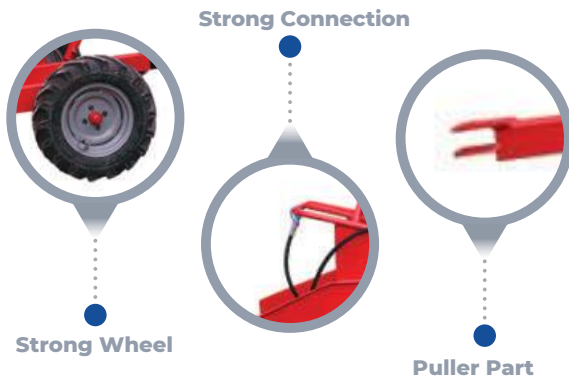




HARVEST MACHINES

● MANUEL TYPE DRUM MOWER



● OPTIONS

Manuel Control Arm



Sharp Blades

● SPECIFICATIONS

Standard drum mower that used to mow or cut Meadow and Grass with the high speed of blades which located in the drums.

This machine has 2 drums and 6-8 blades, and high quality cutting helps to keep nutrient values of grass and meadow and provides the possibility of drying in a very short time.

● TECHNICAL INFORMATION

WORKING WIDTH	125 cm	145 cm	165 cm	195 cm	250 cm
Number of Drums	2	2	2	2	4
Weight	260 kg	300 kg	380 kg	420 kg	515 kg
Number of Blades	6	6	6	6	12
Power Requirement	20 hp	25 hp	30 hp	35 hp	80 hp

● HYDRAULIC TYPE DRUM MOWER



● OPTIONS



● SPECIFICATIONS

Hydraulic drum mower that used to mow or cut Meadow and Grass with the high speed of blades which located in the drums.

This machine has 2 drums and 6-8 blades, and high quality cutting helps to keep nutrient values of grass and meadow and provides the possibility of drying in a very short time.

This model has a hydraulic system that helps the machine to move up after the work finish.


● TECHNICAL INFORMATION

WORKING WIDTH	125 cm	145 cm	165 cm	195 cm	250 cm
Number of Drums	2	2	2	2	4
Weight	260 kg	300 kg	380 kg	420 kg	515 kg
Number of Blades	6	6	6	6	12
Power Requirement	20 hp	25 hp	30 hp	35 hp	80 hp

● ROTARY HAY RAKE



● OPTIONS

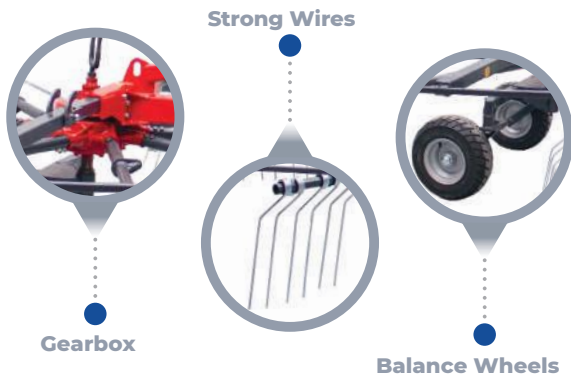

● SPECIFICATIONS


Hay Rakes, Rotary Rakes can move large volumes of crop. They are designed to gather the crop smoothly along the wheels while forming a uniform windrow.

The arms enable rake wheels to follow ground contour, and adjustable ground pressure allows each rake beam to adapt to various crops and conditions.

● TECHNICAL INFORMATION

WORKING WIDTH	300-350 cm
Height	150 cm
Weight	360 kg
Transport Width	150 cm
Number of Arms	9 pcs

● HAY RAKE

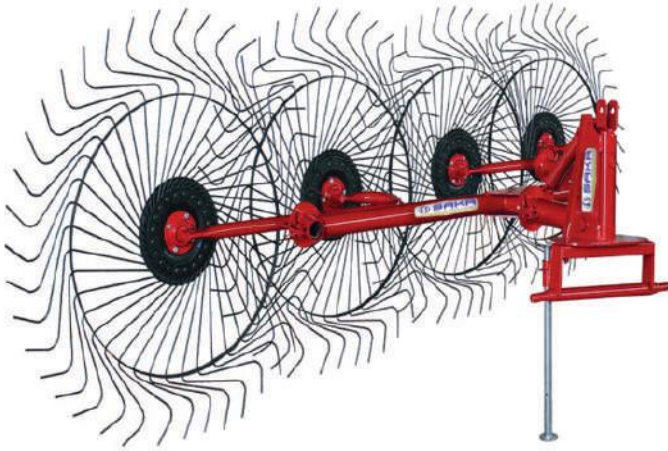

● SPECIFICATIONS


Hay Rakes, Rotary Rakes can move large volumes of crop. They are designed to gather the crop smoothly along the wheels while forming a uniform windrow.

The arms enable rake wheels to follow ground contour, and adjustable ground pressure allows each rake beam to adapt to various crops and conditions.

● TECHNICAL INFORMATION

NUMBER OF WHEEL	4 PCS	4 PCS	5 PCS	5 PCS
Connection Type	with Pin	with Lock	with Pin	with Lock
Length	400	425	500	530
Weight	160 kg	170 kg	190 kg	205 kg
Working Width	250-300cm	250-300cm	300-350cm	300-350cm
Transport Width	140 cm	140 cm	230 cm	230 cm


● OPTIONS

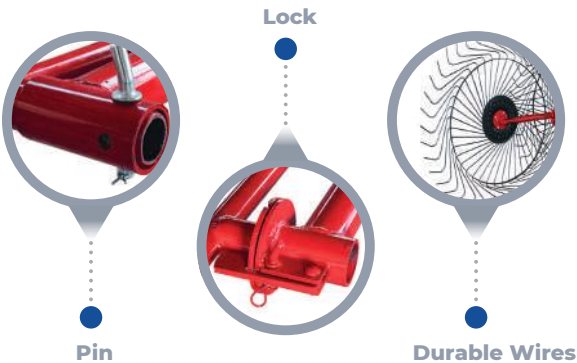

.....● CORN SILAGE MACHINE



.....● OPTIONS

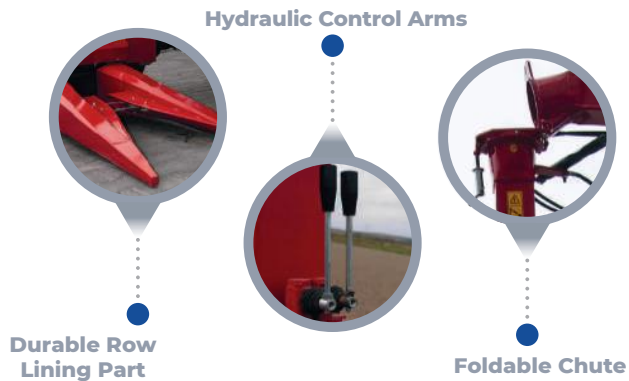

.....● SPECIFICATIONS

For the protection of the feeding system an easily accessible shear bolt is mounted on the machine. It protects the feeding system against the intake of earth and stones in bad conditions.

While in operation, height adjustable wheel maintain an even working height thus preventing the intake of earth and stones in bad conditions.

.....● TECHNICAL INFORMATION

WORKING TYPE	WITH BELT	WITH GEARBOX
Height	300 cm	340 cm
Weight	600 kg	540 kg
Width	230 cm	240 cm
Length	210 cm	230 cm
Work Capacity (ton/hour)	49	35
Number of Blades	10 pcs	12 pcs
Number of Pallets	5 pcs	6 pcs
Power Requirement	45 hp	45 hp

GRASS SILAGE MACHINE



OPTIONS



Spiral Feeding System

Trailer Knife



SPECIFICATIONS

Harvesters are used for harvesting every kind of green fodder and grass in order to feed the animals directly or for making silage. The free floating knives on the rotor are specially designed in order to prevent the damage to the machine when they hit a hard material like stones in the field.

TECHNICAL INFORMATION

WORKING TYPE	SINGLE CHOPPING	DOUBLE CHOPPING
Height	360 cm	365 cm
Weight	640 kg	970 kg
Width	338 cm	332 cm
Road Position Length	450 cm	254 cm
Work Position Length	250 cm	254 cm
Work Capacity (ton/hour)	20	20
Number of Blades	24 pcs	40+8 pcs
Working Width	150 cm	150 cm
Power Requirement	60 hp	60 hp

.....● SQUARE BALER



.....● OPTIONS

Fork System



.....● SPECIFICATIONS

Baler models are special machines of very light weight and maximum agility. Most technical solutions are similar to those of the larger models but, thanks to their unique specifications, they can be used on very steep or very soft terrains, like mountains or rice fields, providing a surprising farming experience.

Among their accessories we find the hydraulic pick-up lift, the mechanic of hydraulic drawbar adjustment systems and the humidity sensor for the compression chamber.

.....● TECHNICAL INFORMATION

TYPE	2 STRING	3 STRING
Height	188 cm	188 cm
Weight	2000 kg	2200 kg
Width	253 cm	253 cm
Length	553 cm	553 cm
Working Width	150-163 cm	150-163 cm
Power Requirement	70 hp	90 hp

● ROUND BALER



● OPTIONS

Support Wheel



● SPECIFICATIONS

Round baler machine is designed to work continuously. Automatic lubrication system, sensed press chamber, pick-up system with tries, top cutter system and many other features make Fimaks round baler machine easy-to-use on professional level.

While top cutter system adjusts the particule length, sensors inside the press chamber leads operator to get ideal bales.

● TECHNICAL INFORMATIONS

BALE DIAMETER	MIN 90 CM MAX 170 CM
Bale Width	123 cm
Pick-up Working Width	220 cm
Width	225 cm
Height	275 cm
Length	440 cm
Weight	2960 kg
Power Requirement	80 hp



SOIL WORKING MACHINES

STANDARD PLOUGH



OPTIONS

Tractor Plough
Compatibility



Connection Part

SPECIFICATIONS

Our selected materials of high quality, certain heat treatment become more durable by undergoing processes has been brought. Latest technology and new generation production methods It is produced with the aim of efficient agriculture.


TECHNICAL INFORMATION

FURROW NUMBER	3 PCS	4 PCS	5 PCS	6 PCS
Furrow Dimension	8-16 inch	8-16 inch	8-14 inch	8-11 inch
Weight	230-400 kg	325-565 kg	395-680 kg	460-640 kg
Power Requirement	40-90 hp	50-105 hp	55-115 hp	60-95 hp

● SPRING AUTOMATIC PLOUGH



● OPTIONS

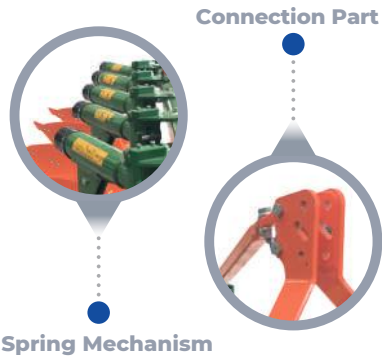

● SPECIFICATIONS

Our ploughs; It provides uninterrupted tillage on stony, hardened, covered with vegetal roots and prepared for new planting. It does not tire the tractor and saves time and fuel.

● TECHNICAL INFORMATION


FURROW NUMBER	3 PCS	4 PCS	5 PCS
Furrow Dimension	10-14 inch	10-14 inch	10-14 inch
Weight	620-640 kg	785-810 kg	940-960 kg
Power Requirement	50-85 hp	65-95 hp	70-120 hp

● PROFILE CHASSIS PLOUGH



● OPTIONS

Minimum Clod



Optimum
Chassis Height

● SPECIFICATIONS


Our selected materials of high quality, certain heat treatment, tension removal etc. more durable by going through processes such as has been made. Latest technology and new generation production methods

It is produced with the aim of efficient agriculture.

● TECHNICAL INFORMATION

FURROW NUMBER	3 PCS	4 PCS	5 PCS
Furrow Dimension	10-14 inch	10-14 inch	10-14 inch
Weight	620-640 kg	785-810 kg	940-960 kg
Power Requirement	50-85 hp	65-95 hp	70-120 hp

● REVERSIBLE PLOUGH

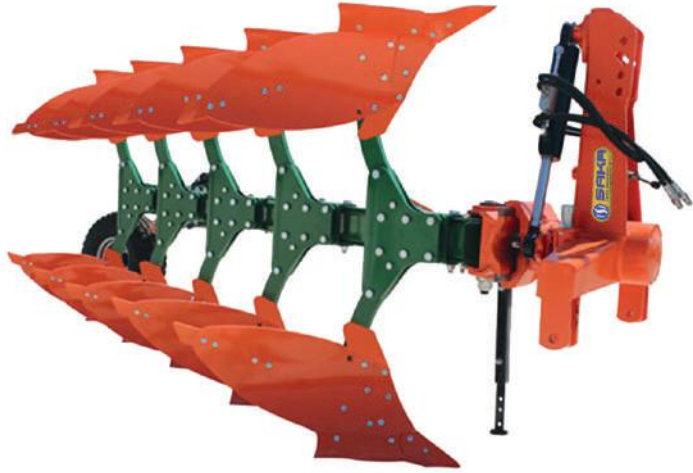

● OPTIONS



● SPECIFICATIONS

Our high quality materials are selected from certain heat treatment processes. was made even more durable. The latest technology and with the aim of efficient agriculture by applying production methods is produced.


● TECHNICAL INFORMATION

FURROW NUMBER	3 PCS	4 PCS	5 PCS
Furrow Dimension	12-16 inch	12-14 inch	12-14 inch
Weight	920-975 kg	995-1000 kg	1140-1160 kg
Power Requirement	65-95 hp	85-100 hp	95-130 hp

● DISC PLOUGH



● OPTIONS

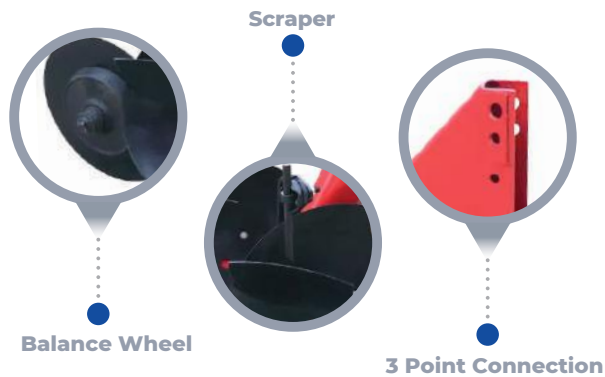

● SPECIFICATIONS

The disc ploughs are produced to work in every type of soil by the basic principles such as soil breaking, soil raising, soil turning and soil mixing. The disc ploughs are used to open the new fields and to process the stony areas. While processing, it avoids the occurrence of the big holes and the upper part of furrow becoming muddy.

● TECHNICAL INFORMATIONS

DISC NUMBER	2	3	4	5	6
Disc Diameter	660 mm	660 mm	660 mm	660 mm	660 mm
Discs Distance	68 cm	68 cm	68 cm	68 cm	68 cm
Working Width	50-70 cm	70-100 cm	90-130 cm	110-160 cm	130-190 cm
Weight	365 kg	470 kg	590 kg	665 kg	770 kg
Power Requirement	40-50 hp	50-60 hp	60-80 hp	80-90 hp	90-110 hp

● POWER HARROW



● OPTIONS



● SPECIFICATIONS

Imagine a machine that tills the soil completely without creating stratification and keeps the moisture inside.

Main body is assembled from one-piece component.


● TECHNICAL INFORMATION

HOE QUANTITY	24 PCS	28 PCS	32 PCS
Total Width	310 cm	360 cm	410 cm
Work Width	300 cm	350 cm	400 cm
Weight	1400 kg	1600 kg	1700 kg
Power Requirement	100-160 hp	120-180 hp	130-180 hp

● ROTARY TILLER



● OPTIONS

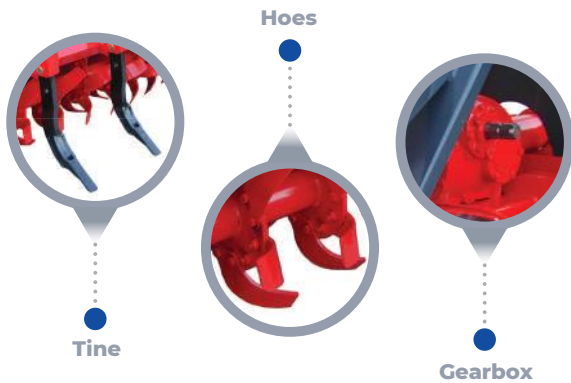

● SPECIFICATIONS

Crumbles the soil, mixes organic matter in the soil and creates maximum seed and soil touch.

Strong gear set, durable main body, higher rotor speed, specially adjusted hoe angles.


● TECHNICAL INFORMATION

WORKING WIDTH	210 cm	230 cm	265 cm	285 cm	300cm
Total Width	230 cm	255 cm	285 cm	305 cm	320 cm
Weight	650 kg	710 kg	800 kg	885 kg	915 kg
Number of Blades	48	54	60	66	72
Power Requirement	55-65 hp	65-75 hp	75-85 hp	80-85 hp	85-110 hp

GOBLE DISC HARROW



OPTIONS

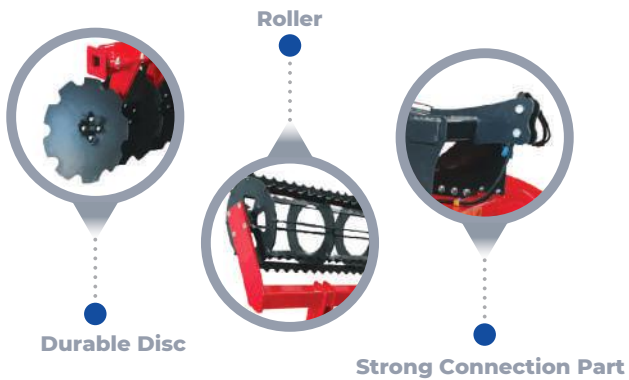

SPECIFICATIONS

Prepares seed bed, destroys stubbles, mixes manure.
All are applied with minimum effort and expense.


TECHNICAL INFORMATION

DISC NUMBER	16	18	20	24	28	32
Disc Diameter	560x5 mm	560x5 mm	560x5 mm	560x5 mm	560x5 mm	560x5 mm
Discs Distance	23 cm	23 cm	23 cm	23 cm	23 cm	23 cm
Working Width	200 cm	225 cm	250 cm	300 cm	350 cm	400 cm
Total Width	165 cm	165 cm	165cm	165 cm	165 cm	165 cm
Total Length	220 cm	245 cm	270 cm	320 cm	370 cm	420 cm
Height	155 cm	155 cm	155 cm	155 cm	155 cm	155 cm
Weight	1325 kg	1375 kg	1405 kg	1540 kg	1620 kg	1910 kg
Power Requirement	75-80 hp	80-85 hp	85-90 hp	95-100 hp	100-105 hp	115-120 hp

● DISC HARROW



● OPTIONS

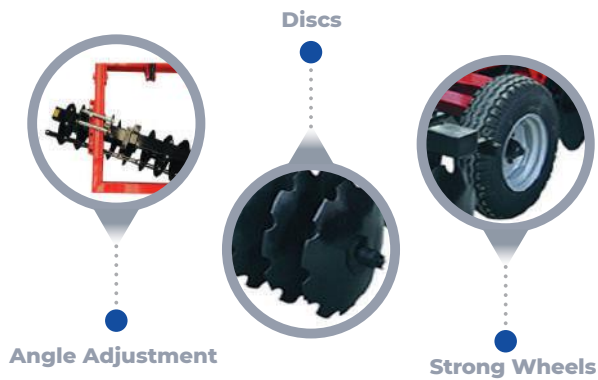

● SPECIFICATIONS

Prepares seed bed, destroys stubbles, mixes manure.
All are applied with minimum effort and expense.

● TECHNICAL INFORMATIONS

DISC NUMBER	20	22	24	26	28	30
Disc Diameter	610x5 mm	610x5 mm	610x5 mm	610x5 mm	610x5 mm	610x5 mm
Discs Distance	23 cm	23 cm	23 cm	23 cm	23 cm	23 cm
Working Width	220 cm	240 cm	260 cm	280 cm	300 cm	320 cm
Total Width	260 cm	280 cm	300 cm	320 cm	340 cm	360 cm
Weight	1510 kg	1570 kg	1630 kg	1690 kg	1730 kg	1900 kg
Power Requirement	75-80 hp	80-90 hp	90-100 hp	100-110 hp	110-120 hp	120-130 hp

● HORIZONTAL SPRING CULTIVATOR



● OPTIONS

Horizontal Spring



● SPECIFICATIONS

These are produced in two different models, standard and heavy type and with 5,7,9,11,13,15 tines. You can use our cultivator for the secondary dressing of soil, preparing seedbed, loosening the soil, breaking the lumps, cutting wild weed, improving the water distribution and preventing the soil from making sole. Cultivator keeps the moisture soil so it does not process the soil by overturning and it hoes rows by adjusting the changeable tines distances.

● TECHNICAL INFORMATION

NUMBER OF TINES	5 PCS	7 PCS	9 PCS	11 PCS	13 PCS	15 PCS
Height	57 cm	57 cm	57 cm	57 cm	57 cm	57 cm
Working Width	130 cm	175 cm	225 cm	275 cm	325 cm	375 cm
Working Depth	42 cm	42 cm	42 cm	42 cm	42 cm	42 cm
Length	125 cm	170 cm	220 cm	270 cm	320 cm	370 cm
Weight	250 kg	300 kg	350 kg	410 kg	460 kg	510 kg
Power Requirement	35 hp	35 hp	50 hp	60 hp	80 hp	100 hp

● VERTICAL SPRING CULTIVATOR



● OPTIONS

Vertical Spring



● SPECIFICATIONS

These are produced in two different models, standard and heavy type - and with 5,7,9,11,13,15 tines. You can use our cultivator for the secondary dressing of soil, preparing seedbed, loosening the soil, breaking the lumps, cutting wild weed, improving the water distribution and preventing the soil from making sole. Cultivator keeps the moisture soil so it does not process the soil by overturning and it hoes rows by adjusting the changeable tines distances.

● TECHNICAL INFORMATION

NUMBER OF TINES	5 PCS	7 PCS	9 PCS	11 PCS	13 PCS	15 PCS
Height	57 cm	57 cm	57 cm	57 cm	57 cm	57 cm
Working Width	125 cm	170 cm	220 cm	270 cm	320 cm	370 cm
Working Depth	42 cm	42 cm	42 cm	42 cm	42 cm	42 cm
Weight	340 kg	390 kg	504 kg	594 kg	690 kg	798 kg
Power Requirement	35 hp	35 hp	50 hp	60 hp	80 hp	100 hp

● FERTILIZER HOEING MACHINE



● OPTIONS

Track Wheel



● SPECIFICATIONS

This machine is used for fertilizing and hoeing between rows of crops such as cotton, maize and sunflower.

It spreads the fertilizer equally near the seeds, thus maximizing the benefit of the crop.

● TECHNICAL INFORMATION

TYPE	3 ROW	5 ROW
Weight	420 kg	610 kg
Width	210 cm	335 cm
Fertilizer Capacity	430 lt	750 şt
Working Width	150-163 cm	150-163 cm
Power Requirement	45-60 hp	55-90 hp

● DETACHED FERTILIZER HOEING MACHINE ● SPECIFICATIONS



This machine has locked cranks system that allows quick and practical connection to the tractor. Also, some parts of this machine are oven-painted for long-term use.

Disc springs are strengthened against impacts.

● TECHNICAL INFORMATION

TYPE	5 ROW	7 ROW	9 ROW
Length	165 cm	165 cm	185 cm
Height	135 cm	215 cm	225 cm
Weight	655 kg	825 kg	1260 kg
Width	325 cm	480 cm	600 cm
Power Requirement	45-55 hp	70-90 hp	130-180 hp

● OPTIONS

Functional Leg



● HOLE DIGGER



● OPTIONS



● SPECIFICATIONS

Hole Digger mainly consists of power head, PTO shaft and auger. The auger consists of a screwdriver bit on the auger tip, with threads on the auger tip. Simple structure, effectively speed working, more powerful drill ability, low operating cost, high flexibility. Hole Digger can be easily mounting to the tractor with the three-point hitch connection.

● TECHNICAL INFORMATION

WORKING DEPTH	850 mm	1000 mm
Height	750 mm	880 mm
Weight	100 kg	135 kg
Width	850 mm	850 mm
Length	2500 mm	2900 mm
Power Requirement	15-40 hp	40-90 hp



TRAILERS

.....● SINGLE AXLE TRAILER



.....● OPTIONS

Strong Wheels



.....● SPECIFICATIONS

Trailers are durable and long lasting.
Its usage area is expanding with its right-left opening options.

.....● TECHNICAL INFORMATION

CAPACITY	Between 1-6 Tons
Discharge	Backwards Damper
Brake	Hydraulic
Optional Equipment	Air Brake

● DOUBLE AXLE TRAILER



● OPTIONS



● SPECIFICATIONS

Trailers are durable and long lasting.

Its usage area is expanding with its right-left opening options.

● TECHNICAL INFORMATION

CAPACITY	Between 4-16 Tons
Discharge	Backwards Damper
Brake	Hydraulic
Optional Equipment	Air Brake Sideways Damper (Left / Right)

.....● SINGLE AXLE TANDEM TRAILER



.....● OPTIONS



.....● SPECIFICATIONS

Trailers are durable and long lasting.
Its usage area is expanding with its right-left opening options.


.....● TECHNICAL INFORMATION

CAPACITY	Between 1-6 Tons
Discharge	Backwards Damper
Brake	Hydraulic
Optional Equipment	Air Brake

● DOUBLE AXLE TANDEM TRAILER



● OPTIONS

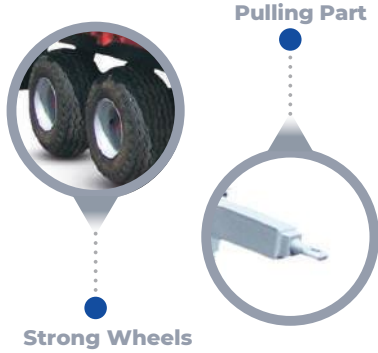

● SPECIFICATIONS

Trailers are durable and long lasting.
Its usage area is expanding with its right-left opening options.

● TECHNICAL INFORMATION

CAPACITY	Between 4-16 Tons
Discharge	Backwards Damper
Brake	Hydraulic
Optional Equipment	Air Brake Sideways Damper (Left / Right)

**Address**

Fevzi Çakmak Mahallesi Kenitra Caddesi
No:9 / B-1 Karatay / KONYA / TÜRKİYE

Phone

+90 (332) 345 4442

E-Mail

info@sakatarim.com.tr

Web

www.sakatarim.com.tr

